


### RCCN 日成HVDRT型环保阻燃线槽 Narrow Slot Wiring Duct





产品材质:采用低卤素硬质PVC料制成,环保无污染,不含铅等有毒物。  
 产品认证:美国UL:E306674 欧洲CE 欧洲环保RoHS,REACH,铁道阻燃低烟。  
 防火等级:UL94V-0,低烟微卤,遇火不燃烧,防火性及绝缘性特佳。  
 产品构造:由槽底及槽盖组成,底槽两侧设有出线孔。  
 颜色:灰色.白色.蓝色.黑色(可定制其它颜色,有起订量要求)  
 工作温度:静态-40°C持续高温至65°C,短时间可达85°C。  
 使用方法:先将底槽固定,将所要配的线装入槽内,盖上槽盖即可。  
 产品特性:1.反扣式槽盖与槽体设计组合后绝不脱落,且接合面平滑,不割伤手及擦损附近配线。  
 2.配线槽65°C内不易断裂,变形,变色,装配省时便利。  
 3.出线孔低、组合容易、拆卸简单、易于配线。


**更多选择:量大可按需求生产所需规格或定制长度.例:HVDR8080T(L=1.7M)**  
 Wide slot/finger design provides greater sidewall rigidity and can be used with a wide range of wire bundle sizes.  
 Certificates:UL:E306674 CE:EN50085 RoHS,REACH. Made of rigid PVC  
 Work temperature:-40 °c to 65 °c  
 UL94 Flammability Rating of V-0  
 Provided with mounting holes  
 Available color:gray.white.blue.black and other special colors  
**Special length come with MOQ request**

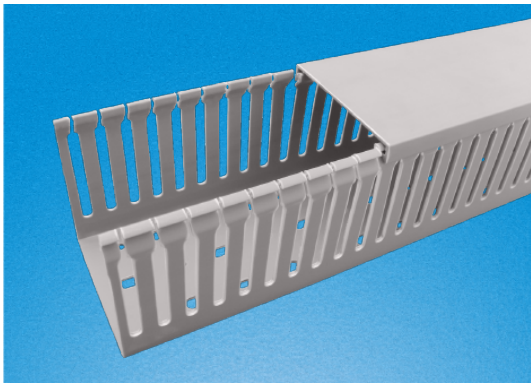

推荐:灰色为常规库存产品,其它颜色有起订量要求。  
 Comment : gray is the common color, other color need more MOQ




样式: 16mm-72mm宽  
 Style : Width from 16mm to 72mm



默认底孔单排孔 Common Hole

样式: 75mm-140mm宽  
 Style : Width from 75mm to 140mm

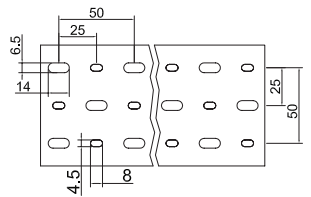

150宽为5排底孔  
 150 width with 5 lines holes

本系列HVDRT为直孔,孔5齿8,孔无分隔齿设计。  
 本系列16/20/33/35/45/65/75高为非标产品。  
 This series is HVDRT,without butterfly design,slot 5,finger 8,  
 16/20/33/35/45/65/75,they are not standard products

大小孔型号/Eu hole size : VDR4060F/614

单位/Unit:mm

型号 Item No.				宽×高 High X width W×H	孔宽 Slot width Q	齿宽 Finger width P	电线容量 以2.0平方计算 Wire capability/2.0sq	标准长度 Standard Length	
灰色Gray RAL7030	白色White RAL9016	蓝色Blue RAL5015	黑色Black RAL9005	20×25	5	8	5~15pcs	每支 2米 含槽底槽盖	
HVDR2025T	HVDR2025TW	HVDR2025TE	HVDR2025TB	25×25	5	8	10~25pcs		
HVDR2525T	HVDR2525TW	HVDR2525TE	HVDR2525TB	30×25	5	8	12~28pcs		
HVDR3025T	HVDR3025TW	HVDR3025TE	HVDR3025TB	40×25	5	8	20~35pcs		
HVDR4025T	HVDR4025TW	HVDR4025TE	HVDR4025TB	50×25	5	8	12~28pcs		
HVDR5025T	HVDR5025TW	HVDR5025TE	HVDR5025TB	15×30	5	8	8~15pcs		
HVDR1530T	HVDR1530TW	HVDR1530TE	HVDR1530TB	20×30	5	8	25~35pcs		
HVDR2030T	HVDR2030TW	HVDR2030TE	HVDR2030TB	25×30	5	8	25~35pcs		
HVDR2530T	HVDR2530TW	HVDR2530TE	HVDR2530TB	30×30	5	8	25~35pcs		
HVDR3030T	HVDR3030TW	HVDR3030TE	HVDR3030TB	40×30	5	8	30~40pcs		
HVDR4030T	HVDR4030TW	HVDR4030TE	HVDR4030TB	50×30	5	8	40~50pcs		
HVDR5030T	HVDR5030TW	HVDR5030TE	HVDR5030TB	60×30	5	8	50~60pcs		
HVDR6030T	HVDR6030TW	HVDR6030TE	HVDR6030TB	33×33	5	8	35~45pcs		Pcs/Branch 2M  Including trunking and lids
HVDR3333T	HVDR3333TW	HVDR3333TE	HVDR3333TB	20×35	5	8	30~40pcs		
HVDR2035T	HVDR2035TW	HVDR2035TE	HVDR2035TB	35×35	5	8	35~45pcs		
HVDR3535T	HVDR3535TW	HVDR3535TE	HVDR3535TB	50×35	5	8	40~60pcs		
HVDR5035T	HVDR5035TW	HVDR5035TE	HVDR5035TB	20×40	5	8	16~22pcs		
HVDR2040T	HVDR2040TW	HVDR2040TE	HVDR2040TB	25×40	5	8	20~35pcs		
HVDR2540T	HVDR2540TW	HVDR2540TE	HVDR2540TB	35×40	5	8	30~45pcs		
HVDR3540T	HVDR3540TW	HVDR3540TE	HVDR3540TB	40×40	5	8	60~70pcs		
HVDR4040T	HVDR4040TW	HVDR4040TE	HVDR4040TB	60×40	5	8	100~115pcs		
HVDR6040T	HVDR6040TW	HVDR6040TE	HVDR6040TB	80×40	5	8	120~135pcs		
HVDR8040T	HVDR8040TW	HVDR8040TE	HVDR8040TB	100×40	5	8	120~135pcs		
HVDR10040T	HVDR10040TW	HVDR10040TE	HVDR10040TB	120×40	5	8	140~155pcs		


# RCCN 日成HVDRT型环保阻燃线槽 Narrow Slot Wiring Duct

型号 Item No.				宽×高 High X width W×H	孔宽 Slot width Q	齿宽 Finger width P	电线容量 以2.0平方计算 Wire capability/2.0sq	标准长度 Standard Length
灰色Gray RAL7030	白色White RAL9016	蓝色Blue RAL5015	黑色Black RAL9005					
HVDR2545T	HVDR2545TW	HVDR2545TE	HVDR2545TB	25×45	5	8	20~25pcs	每支 2米 含槽底槽盖
HVDR3345T	HVDR3345TW	HVDR3345TE	HVDR3345TB	33×45	5	8	40~55pcs	
HVDR4545T	HVDR4545TW	HVDR4545TE	HVDR4545TB	45×45	5	8	60~70pcs	
HVDR6545T	HVDR6545TW	HVDR6545TE	HVDR6545TB	65×45	5	8	110~120pcs	
HVDR2050T	HVDR2050TW	HVDR2050TE	HVDR2050TB	20×50	5	8	18~28pcs	
HVDR2550T	HVDR2550TW	HVDR2550TE	HVDR2550TB	25×50	5	8	20~30pcs	
HVDR3050T	HVDR3050TW	HVDR3050TE	HVDR3050TB	30×50	5	8	25~40pcs	
HVDR3550T	HVDR3550TW	HVDR3550TE	HVDR3550TB	35×50	5	8	40~60pcs	
HVDR4050T	HVDR4050TW	HVDR4050TE	HVDR4050TB	40×50	5	8	60~70pcs	
HVDR4550T	HVDR4550TW	HVDR4550TE	HVDR4550TB	45×50	5	8	70~80pcs	
HVDR5050T	HVDR5050TW	HVDR5050TE	HVDR5050TB	50×50	5	8	80~90pcs	
HVDR5550T	HVDR5550TW	HVDR5550TE	HVDR5550TB	55×50	5	8	85~95pcs	
HVDR6050T	HVDR6050TW	HVDR6050TE	HVDR6050TB	60×50	5	8	100~120pcs	
HVDR7550T	HVDR7550TW	HVDR7550TE	HVDR7550TB	75×50	5	8	150~170pcs	
HVDR8050T	HVDR8050TW	HVDR8050TE	HVDR8050TB	80×50	5	8	160~180pcs	
HVDR10050T	HVDR10050TW	HVDR10050TE	HVDR10050TB	100×50	5	8	200~250pcs	
HVDR12555T	HVDR12555TW	HVDR12555TE	HVDR12555TB	125×55	5	8	220~270pcs	
HVDR2060T	HVDR2060TW	HVDR2060TE	HVDR2060TB	20×60	5	8	35~45pcs	
HVDR2560T	HVDR2560TW	HVDR2560TE	HVDR2560TB	25×60	5	8	40~50pcs	
HVDR3060T	HVDR3060TW	HVDR3060TE	HVDR3060TB	30×60	5	8	60~80pcs	
HVDR3560T	HVDR3560TW	HVDR3560TE	HVDR3560TB	35×60	5	8	90~105pcs	
HVDR4060T	HVDR4060TW	HVDR4060TE	HVDR4060TB	40×60	5	8	100~115pcs	
HVDR4560T	HVDR4560TW	HVDR4560TE	HVDR4560TB	45×60	5	8	110~125pcs	
HVDR5060T	HVDR5060TW	HVDR5060TE	HVDR5060TB	50×60	5	8	120~135pcs	
HVDR6060T	HVDR6060TW	HVDR6060TE	HVDR6060TB	60×60	5	8	120~135pcs	
HVDR8060T	HVDR8060TW	HVDR8060TE	HVDR8060TB	80×60	5	8	180~210pcs	
HVDR10060T	HVDR10060TW	HVDR10060TE	HVDR10060TB	100×60	5	8	240~290pcs	
HVDR11060T	HVDR11060TW	HVDR11060TE	HVDR11060TB	110×60	5	8	250~300pcs	
HVDR12060T	HVDR12060TW	HVDR12060TE	HVDR12060TB	120×60	5	8	260~320pcs	
HVDR15060T	HVDR15060TW	HVDR15060TE	HVDR15060TB	150×60	5	8	300~360pcs	
HVDR2565T	HVDR2565TW	HVDR2565TE	HVDR2565TB	25×65	5	8	40~50pcs	
HVDR3365T	HVDR3365TW	HVDR3365TE	HVDR3365TB	33×65	5	8	40~70pcs	
HVDR4565T	HVDR4565TW	HVDR4565TE	HVDR4565TB	45×65	5	8	110~120pcs	
HVDR6565T	HVDR6565TW	HVDR6565TE	HVDR6565TB	65×65	5	8	180~200pcs	
HVDR7265T	HVDR7265TW	HVDR7265TE	HVDR7265TB	72×65	5	8	180~230pcs	
HVDR5075T	HVDR5075TW	HVDR5075TE	HVDR5075TB	50×75	5	8	180~210pcs	
HVDR7575T	HVDR7575TW	HVDR7575TE	HVDR7575TB	75×75	5	8	200~240pcs	
HVDR10075T	HVDR10075TW	HVDR10075TE	HVDR10075TB	100×75	5	8	250~290pcs	
HVDR2580T	HVDR2580TW	HVDR2580TE	HVDR2580TB	25×80	5	8	100~120pcs	
HVDR3080T	HVDR3080TW	HVDR3080TE	HVDR3080TB	30×80	5	8	110~125pcs	
HVDR3580T	HVDR3580TW	HVDR3580TE	HVDR3580TB	35×80	5	8	110~130pcs	
HVDR4080T	HVDR4080TW	HVDR4080TE	HVDR4080TB	40×80	5	8	140~160pcs	
HVDR4580T	HVDR4580TW	HVDR4580TE	HVDR4580TB	45×80	5	8	140~160pcs	
HVDR5080T	HVDR5080TW	HVDR5080TE	HVDR5080TB	50×80	5	8	160~180pcs	
HVDR5580T	HVDR5580TW	HVDR5580TE	HVDR5580TB	55×80	5	8	160~180pcs	
HVDR6080T	HVDR6080TW	HVDR6080TE	HVDR6080TB	60×80	5	8	180~210pcs	
HVDR8080T	HVDR8080TW	HVDR8080TE	HVDR8080TB	80×80	5	8	240~290pcs	
HVDR10080T	HVDR10080TW	HVDR10080TE	HVDR10080TB	100×80	5	8	260~350pcs	
HVDR12080T	HVDR12080TW	HVDR12080TE	HVDR12080TB	120×80	5	8	280~380pcs	
HVDR14080T	HVDR14080TW	HVDR14080TE	HVDR14080TB	140×80	5	8	350~450pcs	
HVDR25100T	HVDR25100TW	HVDR25100TE	HVDR25100TB	25×100	5	8	110~160pcs	
HVDR33100T	HVDR33100TW	HVDR33100TE	HVDR33100TB	33×100	5	8	130~165pcs	
HVDR40100T	HVDR40100TW	HVDR40100TE	HVDR40100TB	40×100	5	8	130~175pcs	
HVDR50100T	HVDR50100TW	HVDR50100TE	HVDR50100TB	50×100	5	8	220~250pcs	
HVDR60100T	HVDR60100TW	HVDR60100TE	HVDR60100TB	60×100	5	8	240~290pcs	
HVDR70100T	HVDR70100TW	HVDR70100TE	HVDR70100TB	70×100	5	8	250~340pcs	
HVDR75100T	HVDR75100TW	HVDR75100TE	HVDR75100TB	75×100	5	8	260~350pcs	
HVDR80100T	HVDR80100TW	HVDR80100TE	HVDR80100TB	80×100	5	8	260~350pcs	
HVDR100100T	HVDR100100TW	HVDR100100TE	HVDR100100TB	100×100	5	8	300~400pcs	
HVDR120100T	HVDR120100TW	HVDR120100TE	HVDR120100TB	120×100	5	8	350~450pcs	
HVDR150100T	HVDR150100TW	HVDR150100TE	HVDR150100TB	150×100	5	8	400~650pcs	
HVDR100130T	HVDR100130TW	HVDR100130TE	HVDR100130TB	100×130	5	8	350~450pcs	
HVDR200100T	HVDR200100TW	HVDR200100TE	HVDR200100TB	200×100	5	8	600~800pcs	
HVDR200150T	HVDR200150TW	HVDR200150TE	HVDR200150TB	200×150	5	8	900~1200pcs	

Pcs/Branch  
2M  
Including tuning and lids

每支  
2米  
含槽底槽盖  
Pcs/Branch  
2M  
Including tuning and lids

# RCCN 日成HVDRT型环保阻燃线槽 Narrow Slot Wiring Duct

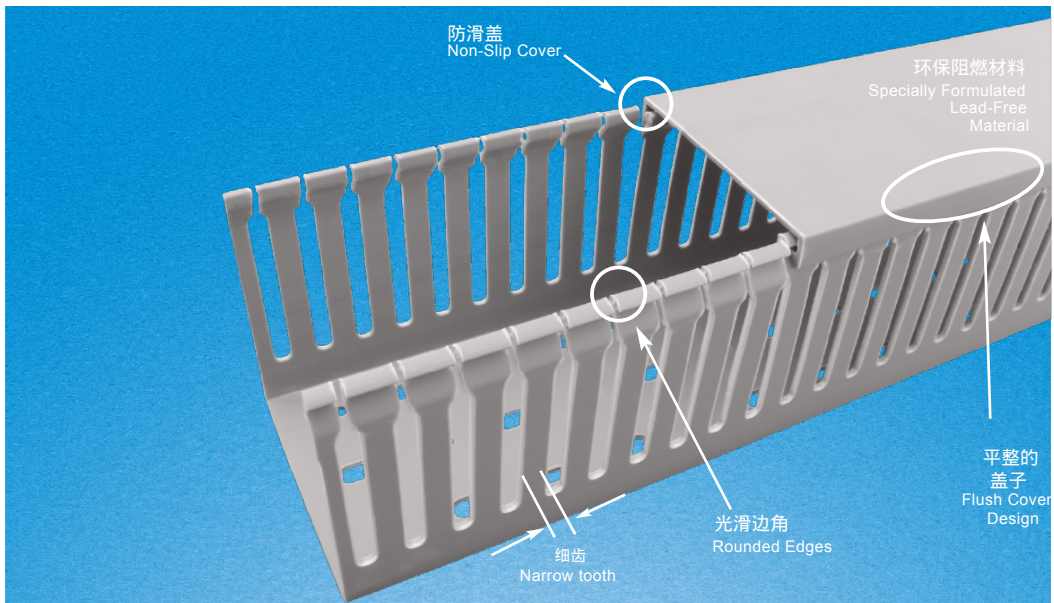

特点/Features	优点/Advantages	益处/Benefits
细的齿和细的孔 Narrow finger and slot design	较近的电器接线空间满足高密度排线 Allows further fanning of wires for neater wire	允许更多的排线,使布线效果整体美观 Mmanagement in high-density control panels
环保阻燃材料 Rohs approved Enviroment-friendly Material	符合欧盟ROHS环保测试, 符合美国UL94V-0,良好的阻燃性 Approved by EU Rohs, Compliant with US UL 94V-0,good inflaming	环保不含有铅的PVC 不会对人体健康构成危害,材料良好阻燃性, 使明火自熄,在着火的情况下,保证安全 Eliminates health concerns associated with PVC that contains lead
光滑的边角 Smooth rounded edges	齿的顶端和孔的边缘光滑 Smooth edges in duct slots and at top of duct fingers	防止电线和手被毛刺割伤 Protects hands and wiring/cabling from abrasion
防滑盖 (non-slip liner inside duct covers)	安装时不容易滑盖 Will not slide easily when installed on duct base	防运输振动导致滑盖 防线槽垂直安装时滑盖 Cover stays in place during shipment, vibration and when in a vertical orientation,eliminating rework
平整的盖子设计 Flush cover design Greater capacity than traditional duct designs	比传统的设计有更大的空间 盖子与槽体齐平 Cover sits flush with sidewall	比老款装相同数量的电线表面更平整美观 Can potentially use a smaller size wiring duct for same number of wires Provides a neat and finished appearance
冲孔断面/Slot smooth	冲孔后齿的表面平整光滑 Smooth edge after punching	不用修毛刺,节省时间 No need to get offer abrasion, save time
四种颜色可选 Four different colors	可用于不同场合的安装要求。 Suitable to different environments using	项目对颜色有要求时选择范围更加的广泛更快的满足终端用户的需求。 Can meet different customers' request in different project
通过多项认证 Approved by many certificates	美国UL,加拿大CULUS, 欧盟CE ,ROHS,REACH 铁道部机车阻燃低烟认证。 America UL,Canada CULUS, EuropeCE ,ROHS,REACH Flamility and low smoking certificate	满足项目应用零配件需要提供产品认证,确保产品在世界各地均可放心使用 Can provide related certificates of the projects or parts need





# RCCN 日成HVDRT型环保阻燃线槽 Narrow Slot Wiring Duct

