

RCCN 日成JF型尼龙拖链 Nylon Drag chain




打开效果

材质：采用尼龙66制造，耐冲击，强度高。
特性：1.适合于用在往复运动的场合，能够对内置的电缆、油管、气管、水管等起到牵引和保护的作用。
2.拖链的每一节都能打开，便于安装和维修。运动时噪音低、耐磨，可高速运动。

应用：拖链已被广泛应用于数控机床,电子设备,消防机械设备,石材机械,玻璃机械,门窗机械,注塑机,机械手,超重运输设备,自动化仓库。

Material:nylon 66,punching resistant,high strength
Features:1, used the place of in to-and-fro, protect and conduct inside cables,old tube, gas tube Water tube
2, every burl can be opened, convenient to instand and amend, low noise when operating, abrasion resistant, moving in high speed

Using: cable chain is used widely in index control machines electric equipment, fir control machines, stone-processing machines, glass-processing machines, door and windows processing machines, extruding machines, machine hands, super transport equipment,auto, warehouse

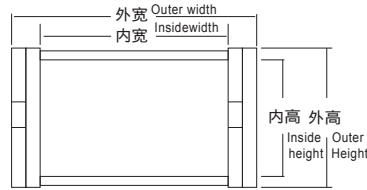


单位/Unit:mm


单位/Unit:mm

型号 Item No.	内高×内宽/外高×外宽 Inner height×Inner width/ Outer height×Outer width	节距/ 每米节数/ Burl instance/ burl no. per meter	弯曲 半径 Bending radius	样式 Type	型号 Item No.	内高×内宽/外高×外宽 Inner height×Inner width/ Outer height×Outer width	节距/ 每米节数/ Burl instance/ burl no. per meter	弯曲 半径 Bending radius	样式 Type
JF0707-15B	7×7/10×12.5	16.7/58	15	不可打开 Locking	JF1837-38B	18×37/23×47	30.5/33	48	不可打开 Locking
JF0707-28B	7×7/10×12.5	16.7/58	28	不可打开 Locking	JF1837-48B	18×37/23×47	30.5/33	48	不可打开 Locking
JF1006-18F	10×6/13.5×13.5	20/50	28	易进型/Easy installing type	JF1837-75B	18×37/23×47	30.5/33	75	不可打开 Locking
JF1010-18B	10×10/15×16.5	15/66	18	不可打开 Locking	JF1818-28B	18×18/23.5×36	33.5/30	28	不可打开 Locking
JF1010-28B	10×10/15×16.5	15/66	28	不可打开 Locking	JF1818-38B	18×18/23.5×36	33.5/30	38	不可打开 Locking
JF1015-28B	10×15/15×20	20/50	28	不可打开 Locking	JF1818-48B	18×18/23.5×36	33.5/30	48	不可打开 Locking
JF1015-38B	10×15/15×20	20/50	38	不可打开 Locking	JF1818-75B	18×18/23.5×36	33.5/30	75	不可打开 Locking
JF1015-18BFB	10×15/15×20	20/50	18	半封闭不可开 Half sealed Locking	JF1825-28B	18×25/23×36	30.5/33	28	不可打开 Locking
JF1015-28BFB	10×15/15×20	20/50	28	半封闭不可开 Half sealed Locking	JF1825-38B	18×25/23×36	30.5/33	38	不可打开 Locking
JF1020-18B	10×20/15.5×28.5	20/50	18	不可打开 Locking	JF1825-48B	18×25/23×36	30.5/33	48	不可打开 Locking
JF1020-28B	10×20/15.5×28.5	20/50	28	不可打开 Locking	JF1825-75B	18×25/23×36	30.5/33	75	不可打开 Locking
JF1020-28BFB	10×20/15.5×28.5	20/50	28	半封闭不可开 Half sealed Locking	JF1825-100W	18×25/23×36	30.5/33	100	外部打开 Opening outside
JF1020-38BFB	10×20/15.5×28.5	20/50	38	半封闭不可开 Half sealed Locking	JF1825-150W	18×25/23×36	30.5/33	150	外部打开 Opening outside
JF1520-28B	15×20/20×28.5	20/50	28	不可打开 Locking	JF1825-200W	18×25/23×36	30.5/33	200	外部打开 Opening outside
JF1520-38B	15×20/20×28.5	20/50	38	不可打开 Locking	JF1825-250W	18×25/23×36	30.5/33	250	外部打开 Opening outside
JF1530-28B	15×30/20×38.5	20/50	28	不可打开 Locking	JF1825-300W	18×25/23×36	30.5/33	300	外部打开 Opening outside
JF1515-28B	15×15/20×20	20/50	28	不可打开 Locking	JF1825-350W	18×25/23×36	30.5/33	350	外部打开 Opening outside
JF1520-28BFB	15×20/20×28.5	20/50	28	不可打开 Locking	JF1825-400W	18×25/23×36	30.5/33	400	外部打开 Opening outside
JF1520-38BFB	15×20/20×28.5	20/50	38	不可打开 Locking	JF1825-450W	18×25/23×36	30.5/33	450	外部打开 Opening outside
JF1530-28BFB	15×30/20×38.5	20/50	28	不可打开 Locking	JF1825-500W	18×25/23×36	30.5/33	500	外部打开 Opening outside
JF1540-28BFB	15×40/20×48.5	20/50	28	不可打开 Locking	JF1825-550W	18×25/23×36	30.5/33	550	外部打开 Opening outside
JF1540-38BFB	15×40/20×48.5	20/50	38	不可打开 Locking	JF1825-600W	18×25/23×36	30.5/33	600	外部打开 Opening outside
JF1550-28BFB	15×50/20×58.5	20/50	28	不可打开 Locking	JF1825-650W	18×25/23×36	30.5/33	650	外部打开 Opening outside
JF1550-48BFB	15×50/20×58.5	20/50	48	不可打开 Locking	JF1825-700W	18×25/23×36	30.5/33	700	外部打开 Opening outside
JF1825-38B	18×25/23×36	30.5/33	38	不可打开 Locking	JF1825-750W	18×25/23×36	30.5/33	750	外部打开 Opening outside
JF1825-48B	18×25/23×36	30.5/33	48	不可打开 Locking	JF1825-800W	18×25/23×36	30.5/33	800	外部打开 Opening outside
JF1825-75B	18×25/23×36	30.5/33	75	不可打开 Locking	JF1825-850W	18×25/23×36	30.5/33	850	外部打开 Opening outside
JF1825-38W	18×25/23×36	30.5/30	38	外部打开 Opening outside	JF1825-900W	18×25/23×36	30.5/33	900	外部打开 Opening outside
JF1825-48W	18×25/23×36	30.5/30	48	外部打开 Opening outside	JF1825-950W	18×25/23×36	30.5/33	950	外部打开 Opening outside
JF1825-75W	18×25/23×36	30.5/30	75	外部打开 Opening outside	JF1825-1000W	18×25/23×36	30.5/33	1000	外部打开 Opening outside
JF1825-100W	18×25/23×36	30.5/30	100	外部打开 Opening outside	JF1825-1050W	18×25/23×36	30.5/33	1050	外部打开 Opening outside
JF1837-38B	18×37/23×47	30.5/33	38	不可打开 Locking	JF1825-1100W	18×25/23×36	30.5/33	1100	外部打开 Opening outside
JF1837-48B	18×37/23×47	30.5/33	48	不可打开 Locking	JF1825-1150W	18×25/23×36	30.5/33	1150	外部打开 Opening outside
JF1837-75B	18×37/23×47	30.5/33	75	不可打开 Locking	JF1825-1200W	18×25/23×36	30.5/33	1200	外部打开 Opening outside
JF1818-28BFB	18×18/23.5×36	33.5/30	28	不可打开 Locking	JF1825-1250W	18×25/23×36	30.5/33	1250	外部打开 Opening outside
JF1818-38BFB	18×18/23.5×36	33.5/30	38	不可打开 Locking	JF1825-1300W	18×25/23×36	30.5/33	1300	外部打开 Opening outside
JF1818-48BFB	18×18/23.5×36	33.5/30	48	不可打开 Locking	JF1825-1350W	18×25/23×36	30.5/33	1350	外部打开 Opening outside
JF1825-28BFB	18×25/23.5×36	33.5/30	28	不可打开 Locking	JF1825-1400W	18×25/23×36	30.5/33	1400	外部打开 Opening outside
JF1825-38BFB	18×25/23.5×36	33.5/30	38	不可打开 Locking	JF1825-1450W	18×25/23×36	30.5/33	1450	外部打开 Opening outside
JF1825-48BFB	18×25/23.5×36	33.5/30	48	不可打开 Locking	JF1825-1500W	18×25/23×36	30.5/33	1500	外部打开 Opening outside
JF1825-75BFB	18×25/23.5×36	33.5/30	75	不可打开 Locking	JF1825-1550W	18×25/23×36	30.5/33	1550	外部打开 Opening outside
JF1825-28BFB	18×25/23.5×36	33.5/30	28	不可打开 Locking	JF1825-1600W	18×25/23×36	30.5/33	1600	外部打开 Opening outside
JF1825-38BFB	18×25/23.5×36	33.5/30	38	不可打开 Locking	JF1825-1650W	18×25/23×36	30.5/33	1650	外部打开 Opening outside
JF1825-48BFB	18×25/23.5×36	33.5/30	48	不可打开 Locking	JF1825-1700W	18×25/23×36	30.5/33	1700	外部打开 Opening outside
JF1825-75BFB	18×25/23.5×36	33.5/30	75	不可打开 Locking	JF1825-1750W	18×25/23×36	30.5/33	1750	外部打开 Opening outside
JF1825-28BFB	18×25/23.5×36	33.5/30	28	不可打开 Locking	JF1825-1800W	18×25/23×36	30.5/33	1800	外部打开 Opening outside
JF1825-38BFB	18×25/23.5×36	33.5/30	38	不可打开 Locking	JF1825-1850W	18×25/23×36	30.5/33	1850	外部打开 Opening outside
JF1825-48BFB	18×25/23.5×36	33.5/30	48	不可打开 Locking	JF1825-1900W	18×25/23×36	30.5/33	1900	外部打开 Opening outside
JF1825-75BFB	18×25/23.5×36	33.5/30	75	不可打开 Locking	JF1825-1950W	18×25/23×36	30.5/33	1950	外部打开 Opening outside
JF1825-28BFB	18×25/23.5×36	33.5/30	28	不可打开 Locking	JF1825-2000W	18×25/23×36	30.5/33	2000	外部打开 Opening outside
JF1825-38BFB	18×25/23.5×36	33.5/30	38	不可打开 Locking	JF1825-2050W	18×25/23×36	30.5/33	2050	外部打开 Opening outside
JF1825-48BFB	18×25/23.5×36	33.5/30	48	不可打开 Locking	JF1825-2100W	18×25/23×36	30.5/33	2100	外部打开 Opening outside
JF1825-75BFB	18×25/23.5×36	33.5/30	75	不可打开 Locking	JF1825-2150W	18×25/23×36	30.5/33	2150	外部打开 Opening outside
JF1825-28BFB	18×25/23.5×36	33.5/30	28	不可打开 Locking	JF1825-2200W	18×25/23×36	30.5/33	2200	外部打开 Opening outside
JF1825-38BFB	18×25/23.5×36	33.5/30	38	不可打开 Locking	JF1825-2250W	18×25/23×36	30.5/33	2250	外部打开 Opening outside
JF1825-48BFB	18×25/23.5×36	33.5/30	48	不可打开 Locking	JF1825-2300W	18×25/23×36	30.5/33	2300	外部打开 Opening outside
JF1825-75BFB	18×25/23.5×36	33.5/30	75	不可打开 Locking	JF1825-2350W	18×25/23×36	30.5/33	2350	外部打开 Opening outside
JF1825-28BFB	18×25/23.5×36	33.5/30	28	不可打开 Locking	JF1825-2400W	18×25/23×36	30.5/33	2400	外部打开 Opening outside
JF1825-38BFB	18×25/23.5×36	33.5/30	38	不可打开 Locking	JF1825-2450W	18×25/23×36	30.5/33	2450	外部打开 Opening outside
JF1825-48BFB	18×25/23.5×36	33.5/30	48	不可打开 Locking	JF1825-2500W	18×25/23×36	30.5/33	2500	外部打开 Opening outside
JF1825-75BFB	18×25/23.5×36	33.5/30	75	不可打开 Locking	JF1825-2550W	18×25/23×36	30.5/33	2550	外部打开 Opening outside
JF1825-28BFB	18×25/23.5×36	33.5/30	28	不可打开 Locking	JF1825-2600W	18×25/23×36	30.5/33	2600	外部打开 Opening outside
JF1825-38BFB	18×25/23.5×36	33.5/30	38	不可打开 Locking	JF1825-2650W	18×25/23×36	30.5/33	2650	外部打开 Opening outside
JF1825-48BFB	18×25/23.5×36	33.5/30	48	不可打开 Locking	JF1825-2700W	18×25/23×36	30.5/33	2700	外部打开 Opening outside
JF1825-75BFB	18×25/23.5×36	33.5/30	75	不可打开 Locking	JF1825-2750W	18×25/23×36	30.5/33	2750	外部打开 Opening outside
JF1825-28BFB	18×25/23.5×36	33.5/30	28	不可打开 Locking	JF1825-2800W	18×25/23×36	30.5/33	2800	外部打开 Opening outside
JF1825-38BFB	18×25/23.5×36	33.5/30	38	不可打开 Locking	JF1825-2850W	18×25/23×36	30.5/33	2850	外部打开 Opening outside
JF1825-48BFB	18×25/23.5×36	33.5/30	48	不可打开 Locking	JF1825-2900W	18×25/23×36	30.5/33	2900	外部打开 Opening outside
JF1825-75BFB	18×25/23.5×36	33.5/30	75	不可打开 Locking	JF1825-2950W	18×25/23×36	30.5/33	2950	外部打开 Opening outside
JF1825-28BFB	18×25/23.5×36	33.5/30	28	不可打开 Locking	JF1825-3000W	18×25/23×36	30.5/33	3000	外部打开 Opening outside
JF1825-38BFB	18×25/23.5×36	33.5/30	38	不可打开 Locking	JF1825-3050W	18×25/23×36	30.5/33	3050	外部打开 Opening outside
JF1825-48BFB	18×25/23.5×36	33.5/30	48	不可打开 Locking	JF1825-3100W	18×25/23×36	30.5/33	3100	外部打开 Opening outside
JF1825-75BFB	18×25/23.5×36	33.5/30	75	不可打开 Locking	JF1825-3150W	18×25/23×36	30.5/33	3150	外部打开 Opening outside
JF1825-28BFB	18×25/23.5×36	33.5/30	28	不可打开 Locking	JF1825-3200W	18×25/23×36	30.5/33	3200	外部打开 Opening outside
JF1825-38BFB	18×25/23.5×36	33.5/30	38	不可打开 Locking	JF1825-3250W	18×25/23×36	30.5/33	3250	外部打开 Opening outside
JF1825-48BFB	18×25/23.5×36	33.5/30	48	不可打开 Locking	JF1825-3300W	18×25/23×36	30.5/33	3300	外部打开 Opening outside
JF1825-75BFB	18×25/23.5×36	33.5/30	75	不可打开 Locking	JF1825-3350W	18×25/23×36	30.5/33	3350	外部打开 Opening outside
JF1825-28BFB	18×25/23.5×36	33.5/30	28	不可打开 Locking	JF1825-3400W	18×25/23×36	30.5/33	3400	外部打开 Opening outside
JF1825-38BFB	18×25/23.5×36	33.5/							

RCCN 日成JF型尼龙拖链 Nylon Drag chain

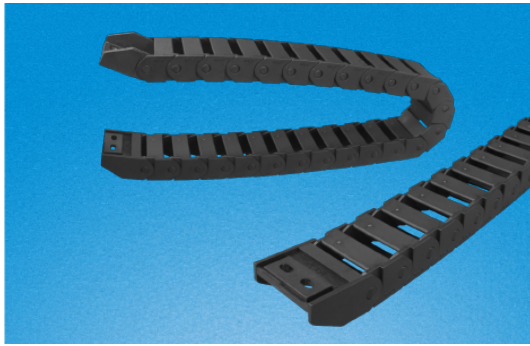

材质：采用尼龙66制造，耐冲击，强度高。
Material: nylon 66, punching resistant, high strength

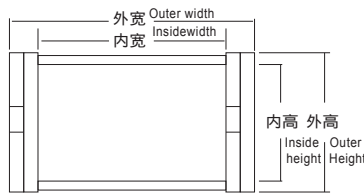

单位/Unit:mm

单位/Unit:mm


型号 Item No.	内高×内宽/外高×外宽 Inner height×Inner width/ Outer height×Outer width	节距/ 每米节数/ Burl instance/ burl no. per meter	弯曲 半径 Bending radius	样式 Type	型号 Item No.	内高×内宽/外高×外宽 Inner height×Inner width/ Outer height×Outer width	节距/ 每米节数/ Burl instance/ burl no. per meter	弯曲 半径 Bending radius	样式 Type							
JF2525-55FS	25×25/35×35	46/22	55	双面打开 Opening double side	JF2557-55NFS	25×57/35×74	46/22	55	加强型 全封闭 打开式 Reinforced whole sealed opening type							
JF2525-75FS			75		JF2557-75NFS			75								
JF2525-100FS			100		JF2557-100NFS			100								
JF2525-125FS			125		JF2557-125NFS			125								
JF2525-150FS			150		JF2577-55NFS			55								
JF2525-175FS			175		JF2577-75NFS			75								
JF2525-200FS			200		JF2577-100NFS			100								
JF2538-55FS	25×38/35×51	46/22	55	全封闭 打开式 Whole sealed opening type	JF2577-125NFS	25×77/35×91	46/22	125	加强型全 封闭打开 Reinforced whole sealed opening type							
JF2538-75FS			75		JF2577-150FS			150								
JF2538-100FS			100		JF2577-175FS			175								
JF2538-125FS			125		JF2577-200FS			200								
JF2538-150FS			150		JF3038-75NS			75								
JF2538-175FS			175		JF3038-100NS			100								
JF2538-200FS			200		JF3038-150NS			150								
JF2557-55FS	25×57/35×71	46/22	55	加强型 打开式 Reinforced opening type	JF3057-75NS	30×57/45×74	46/22	75	双面打开 Opening double side							
JF2557-75FS			75		JF3057-100NS			100								
JF2557-100FS			100		JF3057-150NS			150								
JF2557-125FS			125		JF3077-75NS			75								
JF2557-150FS			150		JF3077-100NS			100								
JF2557-175FS			175		JF3077-150NS			150								
JF2557-200FS			200		JF3038-75NFS			75								
JF2577-55FS	25×77/35×91	46/22	55	加强型 外打开 Reinforced Opening double side	JF3057-100NFS	30×57/45×74	46/22	100	双面打开 Opening double side							
JF2577-75FS			75		JF3057-150NFS			150								
JF2577-100FS			100		JF3077-75NFS			75								
JF2577-125FS			125		JF3077-100NFS			100								
JF2577-150FS			150		JF3077-150NFS			150								
JF2577-175FS			175		JF3550-75S			75								
JF2577-200FS			200		JF3550-150S			150								
JF2538-55NS	25×38/35×55	46/22	55	加强型 打开式 Reinforced opening type	JF3575-75W	35×75/50×93	56/17	75	加强型 打开式 Reinforced opening type							
JF2538-75NS			75		JF3575-150W			150								
JF2538-100NS			100		JF35100-75S			75								
JF2538-125NS			125		JF35100-150S			150								
JF2557-55NS			55		JF35125-75S			75								
JF2557-75NS			75		JF35125-150S			150								
JF2557-100NS			100		JF3550-75NS			75								
JF2557-125NS	125	JF3550-100NS	100													
JF2577-55NS	25×77/35×94	46/22	55	加强型 打开式 Reinforced opening type	JF3550-125NS	35×50/50×68	56/17	125	加强型 打开式 Reinforced opening type							
JF2577-75NS			75		JF3550-150NS			150								
JF2577-100NS			100		JF3550-200NS			200								
JF2577-125NS			125		JF3550-250NS			250								
JF2538-55NFS			25×38/35×55		46/22			55		加强型 打开式 Reinforced opening type						
JF2538-75NFS								75								
JF2538-100NFS								100								
JF2538-125NFS	125															

日成 J F 型尼龙拖链 Nylon Drag chain

RCCN 日成JF型尼龙拖链 Nylon Drag chain



材质：采用尼龙66制造，耐冲击，强度高。
Material: nylon 66, punching resistant, high strength

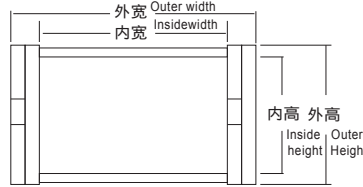

单位/Unit:mm


单位/Unit:mm

型号 Item No.	内高×内宽/外高×外宽 Inner height×Inner width/ Outer height×Outer width	节距/ 每米节数/ Burl instance/ burl no. per meter	弯曲 半径 Bending radius	样式 Type	型号 Item No.	内高×内宽/外高×外宽 Inner height×Inner width/ Outer height×Outer width	节距/ 每米节数/ Burl instance/ burl no. per meter	弯曲 半径 Bending radius	样式 Type	
JF3575-75NS	35×75/55×96	56/17	75	加强型 打开式 Reinforced opening type	JF3575-75NFS	35×75/55×96	56/17	75	加强型 全封闭 打开式 Reinforced whole sealed opening type	
JF3575-100NS			100		JF3575-100NFS			100		
JF3575-125NS			125		JF3575-125NFS			125		
JF3575-150NS			150		JF3575-150NFS			150		
JF3575-200NS			200		JF3575-200NFS			200		
JF3575-250NS			250		JF3575-250NFS			250		
JF35100-75NS	35×100/55×121	56/17	75		JF35100-75NFS	35×100/55×121	56/17	75		
JF35100-100NS			100		JF35100-100NFS			100		
JF35100-125NS			125		JF35100-125NFS			125		
JF35100-150NS			150		JF35100-150NFS			150		
JF35100-200NS			200		JF35100-200NFS			200		
JF35100-250NS			250		JF35100-250NFS			250		
JF35125-75NS	35×125/55×146	56/17	75		JF35125-75NFS	35×125/55×146	56/17	75		
JF35125-100NS			100		JF35125-100NFS			100		
JF35125-125NS			125		JF35125-125NFS			125		
JF35125-150NS			150		JF35125-150NFS			150		
JF35125-200NS			200		JF35125-200NFS			200		
JF35125-250NS			250		JF35125-250NFS			250		
JF35150-75NS	35×150/55×171	56/17	75		JF4550-100S	45×50/64×75	67/15	100		双面打开 Opening double side
JF35150-100NS			100		JF4550-125S			125		
JF35150-125NS			125		JF4550-150S			150		
JF35150-150NS			150		JF4550-175S			175		
JF35150-200NS			200		JF4550-200S			200		
JF35150-250NS			250		JF4550-250S			250		
JF35175-75NS	35×175/55×195	56/17	75	JF4550-300S	45×75/64×100	67/15	300			
JF35175-100NS			100	JF4575-100S			100			
JF35175-125NS			125	JF4575-125S			125			
JF35175-150NS			150	JF4575-150S			150			
JF35175-200NS			200	JF4575-175S			175			
JF35175-250NS			250	JF4575-200S			200			
JF35200-75NS	35×200/55×221	56/17	75	JF4575-250S	45×100/64×125	67/15	250			
JF35200-100NS			100	JF4575-300S			300			
JF35200-125NS			125	JF45100-100S			100			
JF35200-150NS			150	JF45100-125S			125			
JF35200-200NS			200	JF45100-150S			150			
JF35200-250NS			250	JF45100-175S			175			
JF3550-75NFS	35×50/50×68	56/17	75	JF45100-200S	45×125/64×150	67/15	200			
JF3550-100NFS			100	JF45100-250S			250			
JF3550-125NFS			125	JF45100-300S			300			
JF3550-150NFS			150	JF45125-100S			100			
JF3550-200NFS			200	JF45125-125S			125			
JF3550-250NFS			250	JF45125-150S			150			
				JF45125-175S	175					
				JF45125-200S	200					
				JF45125-250S	250					

RCCN 日成JF型尼龙拖链 Nylon Drag chain



材质：采用尼龙66制造，耐冲击，强度高。
Material: nylon 66, punching resistant, high strength

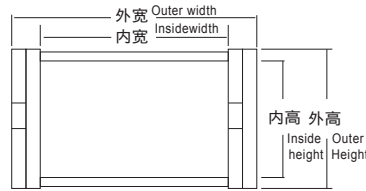

单位/Unit:mm

单位/Unit:mm

型号 Item No.	内高×内宽/外高×外宽 Inner height×Inner width/ Outer height×Outer width	节距/ 每米节数/ Burl instance/ burl no. per meter	弯曲 半径 Bending radius	样式 Type	型号 Item No.	内高×内宽/外高×外宽 Inner height×Inner width/ Outer height×Outer width	节距/ 每米节数/ Burl instance/ burl no. per meter	弯曲 半径 Bending radius	样式 Type		
JF45150-100S	45×150/64×175	67/1	100	双面打开 Opening double side	JF45150-100NFS	45×150/64×175	67/15	100	加强型 全封闭 打开式 Reinforced whole sealed opening type		
JF45150-125S			125		JF45150-125NFS			125			
JF45150-150S			150		JF45150-150NFS			150			
JF45150-175S			175		JF45150-175NFS			175			
JF45150-200S			200		JF45150-200NFS			200			
JF45150-250S			250		JF45150-250NFS			250			
JF45150-300S			300		JF45150-300NFS			300			
JF45175-100S	45×175/64×200	67/15	100		JF45175-100NFS	45×175/64×200	67/15	100		Reinforced whole sealed opening type	
JF45175-125S			125		JF45175-125NFS			125			
JF45175-150S			150		JF45175-150NFS			150			
JF45175-175S			175		JF45175-175NFS			175			
JF45175-200S			200		JF45175-200NFS			200			
JF45175-250S			250		JF45175-250NFS			250			
JF45175-300S			300		JF45175-300NFS			300			
JF45200-100S	45×200/64×225	67/15	100		JF6075-135S	60×75/88×111	91/11	135			双面打开 Opening double side
JF45200-125S			125		JF6075-150S			150			
JF45200-150S			150		JF6075-175S			175			
JF45200-175S			175		JF6075-200S			200			
JF45200-200S			200		JF6075-250S			250			
JF45200-250S			250		JF6075-300S			300			
JF45200-300S			300	JF60100-135S	135						
JF4575-100NFS	45×75/64×100	67/15	100	JF60100-150S	60×100/88×136	91/11	150	Reinforced whole sealed opening type			
JF4575-125NFS			125	JF60100-175S			175				
JF4575-150NFS			150	JF60100-200S			200				
JF4575-175NFS			175	JF60100-250S			250				
JF4575-200NFS			200	JF60100-300S			300				
JF4575-250NFS			250	JF60150-135S			135				
JF4575-300NFS			300	JF60150-150S			150				
JF45100-100NFS	45×100/64×125	67/15	100	JF60150-175S	60×150/88×186	91/11	175		Reinforced whole sealed opening type		
JF45100-125NFS			125	JF60150-200S			200				
JF45100-150NFS			150	JF60150-250S			250				
JF45100-175NFS			175	JF60150-300S			300				
JF45100-200NFS			200	JF60200-135S			135				
JF45100-250NFS			250	JF60200-150S			150				
JF45100-300NFS			300	JF60200-175S			175				
JF45125-100NFS	45×125/64×150	67/15	100	JF60200-200S	60×200/88×236	91/11	200			Reinforced whole sealed opening type	
JF45125-125NFS			125	JF60200-250S			250				
JF45125-150NFS			150	JF60200-300S			300				
JF45125-175NFS			175	JF60300-135S			135				
JF45125-200NFS			200	JF60300-150S			150				
JF45125-250NFS			250	JF60300-175S			175				
JF45125-300NFS			300	JF60300-200S			200				
				JF60300-250S	60×300/88×336	91/11	250				
				JF60300-300S			300				